# Super-rapid fittings for plastic tubes Series 6000 and 6000 Micro

Tube external diameters: 3 (Micro only), 4, 5, 6, 8, 10, 12, 14, 16 mm
Threaded connections: M3 (Micro only), M5, M7, G1/8, G1/4, G3/8, G1/2, R1/8, R1/4, R3/8, R1/2



**Super-rapid fittings Series 6000 are available in 35 different models.**


**Super-rapid fittings Series 6000 Micro are available in 14 different models.**

Connection and disconnection of the tube can be repeated several times and can be performed without the use of tools.
The extractable internal collet allows the sealing ring (O-ring) to be easily replaced if it is damaged or in case of wear of the rubber compound.

## GENERAL DATA

| | |
|---|---|
| **Material** | body and collet: nickel-plated brass;<br>O-Ring: NBR;<br>thread seal: PTFE - NBR - PA |
| **Threads** | series 6000 Micro: M3 - M5 - M7 - G1/8 - G1/4<br>series 6000: GAS conical ISO 7 (BSPT) GAS cylindrical ISO 228 (BSP)<br>M5-M6 and other metric threads available on request<br>NPT on request |
| **Pressure** | min -0,9 bar - max 16 bar (see tubing) |
| **Tube to connect** | Rilsan, PA 6-11-12, polyethylene, PU |
| **Diameters** | series 6000 Micro: ø 3 - 4 - 6 - 8 - 10 mm<br>series 6000: ø 4 mm ÷ ø 16 mm |
| **Fluid** | compressed air (for other types of fluid, contact our engineers) |
| **Temperature** | series 6000 Micro: -10°C ÷ 80°C (see data for tubing used)<br>series 6000: -20°C ÷ 80°C (see data for tubing used) |

## Fitting with conduction tube

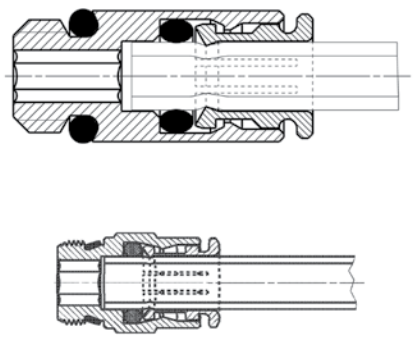




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. S6510

**New sizes**

***Sprint®***







DIMENSIONS

| Mod. | A | D | C | F | G | H | L | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **S6510 4-1/8** | 4 | G1/8 | 3,8 | 8,8 | 13,2 | 5,5 | 18 | 12 | 2,5 | 9 |
| **S6510 4-1/4** | 4 | G1/4 | 5,5 | 8,8 | 15,2 | 7 | 19,5 | 14 | 2,5 | 15 |
| **S6510 5-1/8** | 5 | G1/8 | 3,8 | 9,8 | 13,2 | 5,5 | 19 | 12 | 3 | 8 |
| **S6510 5-1/4** | 5 | G1/4 | 5,5 | 9,8 | 15,2 | 7 | 20 | 14 | 3 | 14 |
| **S6510 6-1/8** | 6 | G1/8 | 6 | 11,7 | 13,2 | 5,5 | 22 | 12 | 4 | 10 |
| **S6510 6-1/4** | 6 | G1/4 | 5,5 | 11,7 | 15,2 | 7 | 21 | 14 | 4 | 14 |
| **S6510 6-3/8** | 6 | G3/8 | 6,5 | 11,7 | 20,5 | 8 | 22,5 | 19 | 4 | 27 |
| **S6510 8-1/8** | 8 | G1/8 | 7,5 | 13,7 | 15,2 | 5,5 | 25 | 14 | 5 | 13 |
| **S6510 8-1/4** | 8 | G1/4 | 6,5 | 13,7 | 15,2 | 7 | 24 | 14 | 6 | 14 |
| **S6510 8-3/8** | 8 | G3/8 | 6 | 13,7 | 20,5 | 8 | 23,5 | 19 | 6 | 25 |
| **S6510 8-1/2** | 8 | G1/2 | 7,5 | 13,7 | 24,5 | 9 | 25 | 22 | 6 | 43 |
| **S6510 10-1/4** | 10 | G1/4 | 8,3 | 15,4 | 18,5 | 7 | 28,5 | 17 | 7 | 23 |
| **S6510 10-3/8** | 10 | G3/8 | 5,3 | 15,4 | 20,5 | 8 | 25,5 | 19 | 8 | 27 |
| **S6510 10-1/2** | 10 | G1/2 | 4,8 | 15,4 | 24,5 | 9 | 25 | 22 | 8 | 39 |
| **S6510 12-1/4** | 12 | G1/4 | 10,3 | 18,3 | 20,5 | 7 | 29,5 | 19 | 7 | 26 |
| **S6510 12-3/8** | 12 | G3/8 | 9,3 | 18,3 | 20,5 | 8 | 28,5 | 19 | 9 | 30 |
| **S6510 12-1/2** | 12 | G1/2 | 5,8 | 18,3 | 24,5 | 9 | 25 | 22 | 10 | 36 |
| **S6510 14-3/8** | 14 | G3/8 | 10,3 | 20,5 | 24,5 | 8 | 30,5 | 22 | 9 | 42 |
| **S6510 14-1/2** | 14 | G1/2 | 6,3 | 20,5 | 24,5 | 9 | 26,5 | 22 | 12 | 34 |
| **S6510 16-1/2** | 16 | G1/2 | 9 | 23,5 | 26,5 | 9 | 32 | 24 | - | 42 |
| **S6510 16-3/4** | 16 | G3/4 | 3,5 | 23,5 | 27,3 | 9 | 26,5 | 24 | - | 46 |

## Fittings Mod. 6512 Micro






DIMENSIONS

| Mod. | A | D | F | H | L | SW1 | Weight (g) | |
|---|---|---|---|---|---|---|---|---|
| **6512 3-M3** | 3 | M3 | 5,8 | 2,5 | 10,2 | 1,5 | 1 | ⋆ |
| **6512 3-M5** | 3 | M5 | 5,8 | 3,5 | 10 | 2 | 1 | • |
| **6512 4-M7-M** | 4 | M7 | 9,4 | 5 | 17,5 | 2,5 | 5 | • |
| **6512 4-1/8-M** | 4 | G1/8 | 11,2 | 5 | 13 | 2,5 | 9 | • |
| **6512 6-M7-M** | 6 | M7 | 10,4 | 5 | 17 | 4 | 7 | • |
| **6512 6-1/8-M** | 6 | G1/8 | 11,2 | 5 | 14 | 4 | 7 | • |
| **6512 8-1/8-M** | 8 | G1/8 | 12,4 | 5 | 18,5 | 5 | 10 | • |
| **6512 10-1/4-M** | 10 | G1/4 | 14,8 | 6 | 21 | 7 | 16 | • |

⋆ = with Mod. 2661 assembled
• = with O-Ring assembled






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6512

With O-Ring assembled







DIMENSIONS

| Mod. | A | D | C | F | G | H | L | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **6512 4-M5** | 4 | M5 | 6 | 7,8 | 8,8 | 4 | 20 | 8 | 2 | 4 |
| **6512 4-M6** | 4 | M6 | 6,5 | 8,8 | 9,9 | 4,5 | 20,5 | 9 | 2,5 | 6 |
| **6512 4-1/8** | 4 | G1/8 | 5 | 8,8 | 13,5 | 6 | 19 | 12 | 2,5 | 10 |
| **6512 4-1/4** | 4 | G1/4 | 6,5 | 8,8 | 16,4 | 7 | 20,5 | 15 | 2,5 | 14 |
| **6512 5-M5** | 5 | M5 | 6 | 8,8 | 9,9 | 4 | 21 | 9 | 2 | 5 |
| **6512 6-M5** | 6 | M5 | 6 | 11,7 | 13,2 | 4 | 22 | 12 | 2 | 8 |
| **6512 6-1/8** | 6 | G1/8 | 5 | 11,7 | 13,5 | 6 | 21 | 12 | 4 | 10 |
| **6512 6-1/4** | 6 | G1/4 | 6 | 11,7 | 16,4 | 7 | 22 | 15 | 4 | 13 |
| **6512 8-1/8** | 8 | G1/8 | 8,5 | 13,7 | 15,2 | 6 | 26 | 14 | 5 | 15 |
| **6512 8-1/4** | 8 | G1/4 | 7 | 13,7 | 16,4 | 7 | 24,5 | 15 | 6 | 17 |
| **6512 8-3/8** | 8 | G3/8 | 6,5 | 13,7 | 20,5 | 7 | 23 | 19 | 6 | 27 |
| **6512 10-1/4** | 10 | G1/4 | 9,8 | 15,4 | 18,5 | 7 | 30 | 17 | 7 | 26 |
| **6512 10-3/8** | 10 | G3/8 | 5,3 | 15,4 | 20,5 | 7 | 24,5 | 19 | 8 | 27 |
| **6512 12-1/4** | 12 | G1/4 | 10,5 | 18,3 | 20,5 | 7 | 29,5 | 19 | 7 | 29 |
| **6512 12-3/8** | 12 | G3/8 | 5,8 | 18,3 | 20,5 | 7 | 24 | 19 | 9 | 24 |

## Fittings Mod. 6463



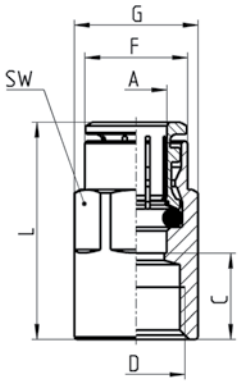


DIMENSIONS

| Mod. | A | D | C | F | G | L | SW | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| **6463 4-M5** | 4 | M5 | 6,5 | 7,8 | 8,8 | 20,5 | 9 | 8 |
| **6463 4-1/8** | 4 | G1/8 | 10 | 9 | 13 | 24 | 12 | 14 |
| **6463 5-1/8** | 5 | G1/8 | 10 | 9,8 | 13 | 25 | 12 | 14 |
| **6463 6-1/8** | 6 | G1/8 | 10 | 11,7 | 13 | 26 | 12 | 14 |
| **6463 6-1/4** | 6 | G1/4 | 11,5 | 11,9 | 16,5 | 27,5 | 15 | 23 |
| **6463 8-1/8** | 8 | G1/8 | 9,5 | 13,7 | 15,2 | 27 | 14 | 16 |
| **6463 8-1/4** | 8 | G1/4 | 11,5 | 13,7 | 16,5 | 29 | 15 | 23 |
| **6463 10-1/4** | 10 | G1/4 | 11,3 | 15,4 | 18,5 | 31,5 | 17 | 29 |




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. S6520

**New sizes**

Swivel elbow Mod. Sprint®







| Mod. | A | D | C | E | F | H | M | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **S6520 4-1/8** | 4 | G1/8 | 3,5 | 14,5 | 9 | 5,5 | 17,5 | 8 | 12 | 17 |
| **S6520 4-1/4** | 4 | G1/4 | 3,5 | 14,5 | 9 | 7 | 17,5 | 8 | 14 | 23 |
| **S6520 5-1/8** | 5 | G1/8 | 5,5 | 14,5 | 10 | 5,5 | 20,5 | 9 | 12 | 17 |
| **S6520 5-1/4** | 5 | G1/4 | 5,5 | 14,5 | 10 | 7 | 20,5 | 9 | 14 | 23 |
| **S6520 6-1/8** | 6 | G1/8 | 4 | 15 | 12,7 | 5,5 | 20 | 9 | 12 | 20 |
| **S6520 6-1/4** | 6 | G1/4 | 4 | 15 | 12,7 | 7 | 20 | 9 | 14 | 23 |
| **S6520 6-3/8** | 6 | G3/8 | 4 | 15,5 | 12,7 | 8 | 20 | 9 | 19 | 33 |
| **S6520 8-1/8** | 8 | G1/8 | 5 | 16 | 14,2 | 5,5 | 22,5 | 11 | 12 | 22 |
| **S6520 8-1/4** | 8 | G1/4 | 5 | 16 | 14,2 | 7 | 22,5 | 11 | 14 | 26 |
| **S6520 8-3/8** | 8 | G3/8 | 5 | 16,5 | 14,2 | 8 | 22,5 | 11 | 19 | 41 |
| **S6520 8-1/2** | 8 | G1/2 | 5 | 17 | 14,2 | 9 | 22,5 | 11 | 22 | 48 |
| **S6520 10-1/4** | 10 | G1/4 | 5,8 | 18,5 | 16,5 | 7 | 26 | 13 | 14 | 32 |
| **S6520 10-3/8** | 10 | G3/8 | 5,8 | 19 | 16,5 | 8 | 26 | 13 | 19 | 43 |
| **S6520 10-1/2** | 10 | G1/2 | 5,8 | 19,5 | 16,5 | 9 | 26 | 13 | 22 | 62 |
| **S6520 12-1/4** | 12 | G1/4 | 7,3 | 20 | 19,5 | 7 | 26,5 | 15 | 17 | 49 |
| **S6520 12-3/8** | 12 | G3/8 | 7,3 | 20 | 19,5 | 8 | 26,5 | 15 | 19 | 48 |
| **S6520 12-1/2** | 12 | G1/2 | 7,3 | 20,5 | 19,5 | 9 | 26,5 | 15 | 22 | 70 |
| **S6520 14-3/8** | 14 | G3/8 | 8,3 | 21 | 21,5 | 8 | 28,5 | 17 | 19 | 74 |
| **S6520 14-1/2** | 14 | G1/2 | 8,3 | 21,5 | 21,5 | 9 | 28,5 | 17 | 22 | 78 |

## Fittings Mod. 6522 Micro

Swivel elbow






| Mod. | A | D | E | H | M | SW | SW1 | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|
| **6522 3-M3** | 3 | M3 | 13,7 | 2,5 | 13,7 | 6 | 6 | 4 | ⋆ |
| **6522 3-M5** | 3 | M5 | 13,7 | 3,5 | 13,7 | 6 | 8 | 5 | ● |

⋆ = with Mod. 2661 assembled
● = with O-Ring assembled




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6522

Swivel elbow with O-Ring assembled







DIMENSIONS

| Mod. | A | D | C | E | F | H | M | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **6522 4-M5** | 4 | M5 | 3,5 | 12,5 | 9 | 4 | 17,5 | 8 | 8 | 12 |
| **6522 4-1/8** | 4 | G1/8 | 3,5 | 14,5 | 9 | 6 | 17,5 | 8 | 12 | 15 |
| **6522 4-1/4** | 4 | G1/4 | 3,5 | 15,5 | 9 | 7 | 17,5 | 8 | 15 | 25 |
| **6522 5-M5** | 5 | M5 | 5,5 | 12,5 | 10 | 4 | 20,5 | 9 | 8 | 13 |
| **6522 6-M5** | 6 | M5 | 4 | 13 | 12,7 | 4 | 20 | 9 | 10 | 14 |
| **6522 6-1/8** | 6 | G1/8 | 4 | 15 | 12,7 | 6 | 20 | 9 | 12 | 19 |
| **6522 6-1/4** | 6 | G1/4 | 4 | 16 | 12,7 | 7 | 20 | 9 | 15 | 27 |
| **6522 8-1/8** | 8 | G1/8 | 5 | 16 | 14,2 | 6 | 22,5 | 11 | 12 | 22 |
| **6522 8-1/4** | 8 | G1/4 | 5 | 17 | 14,2 | 7 | 22,5 | 11 | 15 | 28 |
| **6522 8-3/8** | 8 | G3/8 | 5 | 17 | 14,2 | 7 | 22,5 | 11 | 19 | 45 |
| **6522 10-1/4** | 10 | G1/4 | 5,8 | 19,5 | 16,5 | 7 | 26 | 13 | 15 | 41 |
| **6522 10-3/8** | 10 | G3/8 | 5,8 | 19,5 | 16,5 | 7 | 26 | 13 | 19 | 45 |
| **6522 12-1/4** | 12 | G1/4 | 7,3 | 20 | 19,5 | 7 | 26,5 | 15 | 17 | 51 |
| **6522 12-3/8** | 12 | G3/8 | 7,3 | 20,5 | 19,5 | 7 | 26,5 | 15 | 19 | 56 |

## Fittings Mod. S6500

***Sprint®***






DIMENSIONS

| Mod. | A | D | C | E | F | H | M | SW | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| **S6500 4-1/8** | 4 | R1/8 | 3,5 | 8,5 | 9 | 7,5 | 17,5 | 8 | 9 |
| **S6500 4-1/4** | 4 | R1/4 | 5 | 11,5 | 9 | 12 | 19 | 9 | 13 |
| **S6500 5-1/8** | 5 | R1/8 | 5,5 | 8,5 | 10 | 7,5 | 20,5 | 9 | 13 |
| **S6500 5-1/4** | 5 | R1/4 | 5,5 | 11,5 | 10 | 12 | 20,5 | 9 | 17 |
| **S6500 6-1/8** | 6 | R1/8 | 4 | 9 | 12,7 | 7,5 | 20 | 9 | 15 |
| **S6500 6-1/4** | 6 | R1/4 | 4 | 11,5 | 12,7 | 12 | 20 | 9 | 16 |
| **S6500 8-1/8** | 8 | R1/8 | 5 | 10,5 | 14,2 | 6,5 | 22,5 | 11 | 18 |
| **S6500 8-1/4** | 8 | R1/4 | 5 | 11,5 | 14,2 | 12,5 | 22,5 | 11 | 21 |
| **S6500 8-3/8** | 8 | R3/8 | 7 | 13 | 14,2 | 11,5 | 24,5 | 12 | 25 |
| **S6500 10-1/4** | 10 | R1/4 | 5,8 | 13 | 16,5 | 11,5 | 26 | 13 | 33 |
| **S6500 10-3/8** | 10 | R3/8 | 5,8 | 13 | 16,5 | 12 | 26 | 13 | 33 |
| **S6500 12-1/4** | 12 | R1/4 | 7,3 | 14,5 | 19,5 | 11 | 26,5 | 15 | 46 |
| **S6500 12-3/8** | 12 | R3/8 | 7,3 | 13,5 | 19,5 | 11,5 | 26,5 | 15 | 39 |




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6525

Swivel elbow Mod. Sprint®







DIMENSIONS

| Mod. | A | C | D | E | F | H | M | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **6525 6-1/8** | 6 | 4 | G1/8 | 33,8 | 12,7 | 5,5 | 20 | 9 | 12 | 34 |
| **6525 6-1/4** | 6 | 4 | G1/4 | 34 | 12,7 | 7 | 20 | 9 | 14 | 47 |
| **6525 8-1/8** | 8 | 5 | G1/8 | 34,8 | 14,2 | 5,5 | 22,5 | 11 | 12 | 35 |
| **6525 8-1/4** | 8 | 5 | G1/4 | 35 | 14,2 | 7 | 22,5 | 11 | 14 | 50 |

## Fittings Mod. 6621 Micro

Adjustable with Mod. 2661 assembled



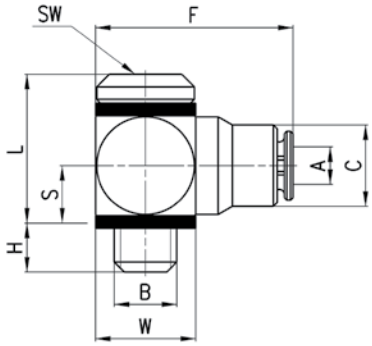



DIMENSIONS

| Mod. | A | B | C | F | H | L | S | W | SW | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **6621 3-M3** | 3 | M3 | 5,8 | 14,2 | 2,5 | 9,3 | 3,5 | 6 | 1,5 | 5 |
| **6621 3-M5** | 3 | M5 | 6,5 | 16 | 3,2 | 11,9 | 4,8 | 8 | 2 | 6 |

## Fitting Mod. 6501 4-M5

With Mod. 2661 assembled






DIMENSIONS

| Mod. | A | C | D | E | F | H | M | SW | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| **6501 4-M5** | 4 | 3,5 | M5 | 6 | 9 | 4 | 17,5 | 8 | 11 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. S6430

Swivel branch tee, Mod. Sprint®







DIMENSIONS

| Mod. | A | D | C | E | F | H | L | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **S6430 4-1/8** | 4 | G1/8 | 3,5 | 14,5 | 9 | 5,5 | 35 | 8 | 12 | 18 |
| **S6430 5-1/8** | 5 | G1/8 | 5,5 | 14,5 | 10 | 5,5 | 41 | 9 | 12 | 24 |
| **S6430 5-1/4** | 5 | G1/4 | 5,5 | 14,5 | 10 | 7 | 41 | 9 | 14 | 30 |
| **S6430 6-1/8** | 6 | G1/8 | 4 | 15 | 12,7 | 5,5 | 40 | 9 | 12 | 28 |
| **S6430 6-1/4** | 6 | G1/4 | 4 | 15 | 12,7 | 7 | 40 | 9 | 14 | 33 |
| **S6430 8-1/8** | 8 | G1/8 | 5 | 16 | 14,2 | 5,5 | 45 | 11 | 12 | 37 |
| **S6430 8-1/4** | 8 | G1/4 | 5 | 16 | 14,2 | 7 | 45 | 11 | 14 | 42 |
| **S6430 8-3/8** | 8 | G3/8 | 5 | 16,5 | 14,2 | 8 | 45 | 11 | 19 | 51 |
| **S6430 10-1/4** | 10 | G1/4 | 5,8 | 18,5 | 16,5 | 7 | 52 | 13 | 14 | 56 |
| **S6430 10-3/8** | 10 | G3/8 | 5,8 | 19 | 16,5 | 8 | 52 | 13 | 19 | 67 |
| **S6430 10-1/2** | 10 | G1/2 | 5,8 | 19,5 | 16,5 | 9 | 52 | 13 | 22 | 85 |
| **S6430 12-1/4** | 12 | G1/4 | 7,3 | 20 | 19,5 | 7 | 53 | 15 | 17 | 60 |
| **S6430 12-3/8** | 12 | G3/8 | 7,3 | 20 | 19,5 | 8 | 53 | 15 | 19 | 65 |
| **S6430 12-1/2** | 12 | G1/2 | 7,3 | 20,5 | 19,5 | 9 | 53 | 15 | 22 | 89 |
| **S6430 14-1/2** | 14 | G1/2 | 8,3 | 21,5 | 21,5 | 9 | 57 | 17 | 22 | 88 |

## Fittings Mod. 6432 Micro

Swivel branch tee



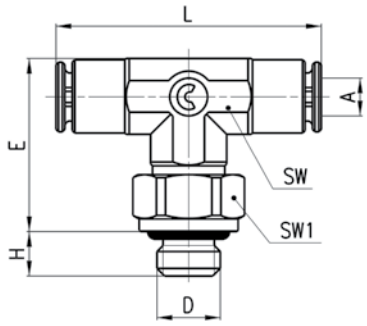


DIMENSIONS

| Mod. | A | D | E | H | L | SW | SW1 | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|
| **6432 3-M3** | 3 | M3 | 13,7 | 2,5 | 21,4 | 6 | 6 | 5 | ⋆ |
| **6432 3-M5** | 3 | M5 | 13,7 | 3,5 | 21,4 | 6 | 8 | 6 | ● |

⋆ = with Mod. 2661 assembled
● = with O-Ring assembled




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6432

Swivel branch tee with O-Ring assembled



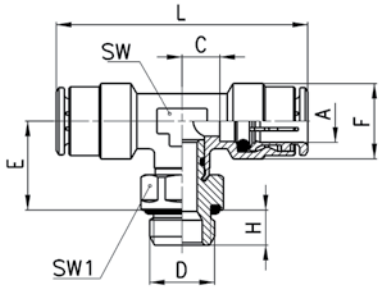



| DIMENSIONS | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Mod. | A | D | C | E | F | H | L | SW | SW1 | Weight (g)) |
| **6432 4-M5** | 4 | M5 | 3,5 | 12,5 | 9 | 4 | 35 | 8 | 8 | 14 |
| **6432 4-1/8** | 4 | G1/8 | 3,5 | 14,5 | 9 | 6 | 35 | 8 | 12 | 19 |
| **6432 5-M5** | 5 | M5 | 5,5 | 12,5 | 10 | 4 | 41 | 9 | 8 | 19 |
| **6432 6-1/8** | 6 | G1/8 | 4 | 15 | 12,7 | 6 | 40 | 9 | 12 | 29 |
| **6432 6-1/4** | 6 | G1/4 | 4 | 16 | 12,7 | 7 | 40 | 9 | 15 | 30 |
| **6432 8-1/8** | 8 | G1/8 | 5 | 16 | 14,2 | 6 | 45 | 11 | 12 | 37 |
| **6432 8-1/4** | 8 | G1/4 | 5 | 17 | 14,2 | 7 | 45 | 11 | 15 | 39 |
| **6432 8-3/8** | 8 | G3/8 | 5 | 17 | 14,2 | 7 | 45 | 11 | 19 | 55 |
| **6432 10-1/4** | 10 | G1/4 | 5,8 | 19,5 | 16,5 | 7 | 52 | 13 | 15 | 59 |
| **6432 10-3/8** | 10 | G3/8 | 5,8 | 19,5 | 16,5 | 7 | 52 | 13 | 19 | 56 |
| **6432 12-1/4** | 12 | G1/4 | 7,3 | 20 | 19,5 | 7 | 53 | 15 | 17 | 60 |
| **6432 12-3/8** | 12 | G3/8 | 7,3 | 20,5 | 19,5 | 7 | 53 | 15 | 19 | 80 |

## Fittings Mod. S6440

***Sprint®.***

Swivel branch tee, Mod. Sprint






| DIMENSIONS | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Mod. | A | D | C | E | F | H | L | M | SW | SW1 | Weight (g) |
| **S6440 4-1/8** | 4 | G1/8 | 3,5 | 14,5 | 9 | 5,5 | 37,5 | 17,5 | 8 | 12 | 23 |
| **S6440 5-1/8** | 5 | G1/8 | 5,5 | 14,5 | 10 | 5,5 | 40,5 | 20,5 | 9 | 12 | 24 |
| | | | | | | | | | | | |
| **S6440 6-1/8** | 6 | G1/8 | 4 | 15 | 12,7 | 5,5 | 40,5 | 20 | 9 | 12 | 26 |
| **S6440 6-1/4** | 6 | G1/4 | 4 | 15 | 12,7 | 7 | 42 | 20 | 9 | 14 | 31 |
| **S6440 8-1/8** | 8 | G1/8 | 5 | 16 | 14,2 | 5,5 | 44 | 22,5 | 11 | 12 | 37 |
| **S6440 8-1/4** | 8 | G1/4 | 5 | 16 | 14,2 | 7 | 45,5 | 22,5 | 11 | 14 | 35 |
| **S6440 8-3/8** | 8 | G3/8 | 5 | 16,5 | 14,2 | 8 | 47 | 22,5 | 11 | 19 | 52 |
| **S6440 10-1/4** | 10 | G1/4 | 5,8 | 18,5 | 16,5 | 7 | 51,5 | 26 | 13 | 14 | 43 |
| **S6440 10-3/8** | 10 | G3/8 | 5,8 | 18,5 | 16,5 | 8 | 53 | 26 | 13 | 19 | 66 |
| **S6440 12-3/8** | 12 | G3/8 | 7,3 | 19,5 | 19,5 | 8 | 54,5 | 26,5 | 15 | 19 | 65 |
| **S6440 14-1/2** | 14 | G1/2 | 8,3 | 21,5 | 21,5 | 9 | 59 | 28,5 | 17 | 22 | 88 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6442 Micro

Swivel run tee



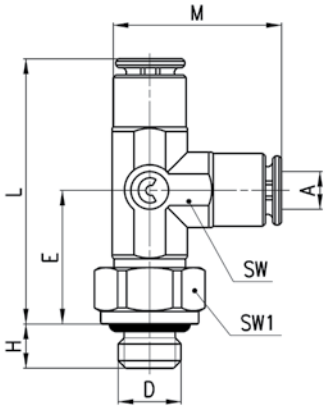



| Mod. | A | D | E | H | L | M | SW | SW1 | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|---|
| **6442 3-M3** | 3 | M3 | 10,7 | 2,5 | 21,4 | 13,7 | 6 | 6 | 5 | ⋆ |
| **6442 3-M5** | 3 | M5 | 12,2 | 3,5 | 21,4 | 13,7 | 6 | 8 | 6 | ● |

⋆ = with Mod. 2661 assembled
● = with O-Ring assembled

## Fittings Mod. 6442

Swivel branch tee with O-Ring assembled



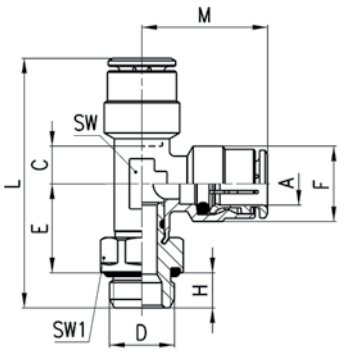


| Mod. | A | C | D | E | F | H | L | M | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **6442 4-M5** | 4 | 3,5 | M5 | 12,5 | 9 | 4 | 34 | 17,5 | 8 | 8 | 18 |
| **6442 4-1/8** | 4 | 3,5 | G1/8 | 14,5 | 9 | 6 | 38 | 17,5 | 8 | 12 | 19 |
| **6442 5-M5** | 5 | 5,5 | M5 | 12,5 | 10 | 4 | 36,5 | 20,5 | 9 | 8 | 19 |
| **6442 6-1/8** | 6 | 4 | G1/8 | 15 | 12,7 | 6 | 41 | 20 | 9 | 12 | 26 |
| **6442 6-1/4** | 6 | 4 | G1/4 | 16 | 12,7 | 7 | 43 | 20 | 9 | 15 | 36 |
| **6442 8-1/8** | 8 | 5 | G1/8 | 16 | 14,2 | 6 | 44,5 | 22,5 | 11 | 12 | 31 |
| **6442 8-1/4** | 8 | 5 | G1/4 | 17 | 14,2 | 7 | 46,5 | 22,5 | 11 | 15 | 42 |
| **6442 8-3/8** | 8 | 5 | G3/8 | 17 | 14,2 | 7 | 46,5 | 22,5 | 11 | 19 | 50 |
| **6442 10-1/4** | 10 | 5,8 | G1/4 | 19,5 | 16,5 | 7 | 52,5 | 26 | 13 | 15 | 46 |
| **6442 10-3/8** | 10 | 5,8 | G3/8 | 19,5 | 16,5 | 7 | 52,5 | 26 | 13 | 19 | 66 |
| **6442 12-1/4** | 12 | 7,3 | G1/4 | 20 | 16,5 | 7 | 53,5 | 26,5 | 15 | 17 | 73 |
| **6442 12-3/8** | 12 | 7,3 | G3/8 | 20,5 | 19,5 | 7 | 54 | 26,5 | 15 | 19 | 64 |




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6452 Micro

Swivel Y connector



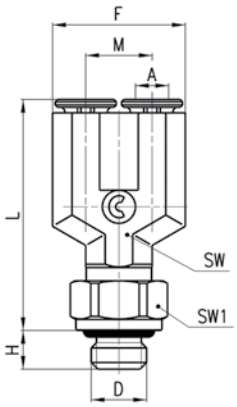


DIMENSIONS

| Mod. | A | D | F | H | L | M | SW | SW1 | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|---|
| **6452 3-M3** | 3 | M3 | 12 | 2,5 | 20,9 | 6 | 6 | 6 | 6 | ⋆ |
| **6452 3-M5** | 3 | M5 | 12 | 3,5 | 20,9 | 6 | 6 | 8 | 7 | ● |


⋆ = with Mod. 2661 assembled
●= with O-Ring assembled

## Fittings Mod. 6541 - S6450

***Sprint®***

Swivel Y connector



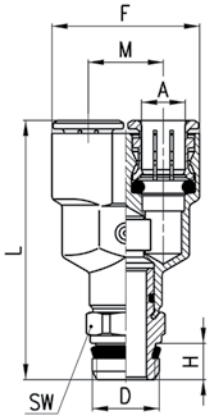


DIMENSIONS


| Mod. | A | D | F | H | L | M | SW | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|
| **6451 4-M5** | 4 | M5 | 18 | 4 | 26,5 | 9 | - | 17 | ⋆ |
| **6451 6-M5** | 6 | M5 | 24,5 | 4 | 29,5 | 12,5 | - | 27 | ⋆ |
| | | | | | | | | | |
| **S6450 4-1/8** | 4 | G1/8 | 18 | 5,5 | 38 | 9 | 12 | 23 | |
| **S6450 6-1/8** | 6 | G1/8 | 24,5 | 5,5 | 41,5 | 12,5 | 12 | 33 | |
| **S6450 8-1/8** | 8 | G1/8 | 28,5 | 5,5 | 48,5 | 14,5 | 14 | 48 | |
| **S6450 8-1/4** | 8 | G1/4 | 28,5 | 7 | 50 | 14,5 | 14 | 50 | |

* = non swivel Model, with Mod. 2661 assembled.

## Fittings Mod. 6622

Banjo with O-Ring assembled






DIMENSIONS

| Mod. | A | B | C | E | F | H | L | M | SW | W | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **6622 4-M5** | 4 | M5 | 4 | 5,7 | 8,8 | 4 | 15,8 | 18 | 2,5 | Ø 8 | 10 |
| **6622 4-1/8** | 4 | G1/8 | 7,5 | 10,2 | 9 | 5 | 25 | 21,5 | 4 | Ø 14 | 22 |
| **6622 6-1/8** | 6 | G1/8 | 8 | 10,2 | 12,7 | 5 | 25 | 24 | 4 | Ø 14 | 24 |
| **6622 6-1/4** | 6 | G1/4 | 10 | 9,1 | 12,7 | 6 | 25,3 | 26 | 5 | Ø 18 | 35 |
| **6622 8-1/8** | 8 | G1/8 | 8 | 10,2 | 14,2 | 5 | 25 | 25,5 | 4 | Ø 14 | 28 |
| **6622 8-1/4** | 8 | G1/4 | 10 | 9,1 | 14,2 | 6 | 25,3 | 27,5 | 5 | Ø 18 | 39 |
| **6622 10-1/4** | 10 | G1/4 | 8,8 | 9,1 | 16,5 | 6 | 25,3 | 29 | 5 | Ø 18 | 42 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6632

Banjo with O-Ring assembled



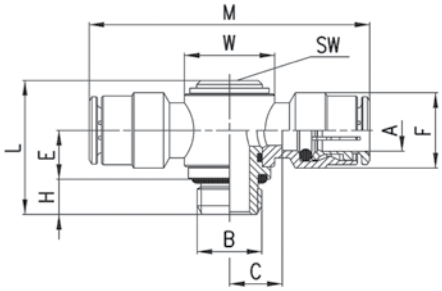



| DIMENSIONS | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Mod. | A | B | C | E | F | H | L | M | W | SW | Weight (g) |
| **6632 4-1/8** | 4 | G1/8 | 7,5 | 10,2 | 9 | 5 | 25 | 43 | Ø 14 | 4 | 24 |
| **6632 6-1/8** | 6 | G1/8 | 8 | 10,2 | 12,7 | 5 | 25 | 48 | Ø 14 | 4 | 33 |
| **6632 6-1/4** | 6 | G1/4 | 10 | 9,1 | 12,7 | 6 | 25,3 | 52 | Ø 18 | 5 | 35 |
| **6632 8-1/8** | 8 | G1/8 | 8 | 10,2 | 14,2 | 5 | 25 | 51 | Ø 14 | 4 | 39 |
| **6632 8-1/4** | 8 | G1/4 | 10 | 9,1 | 14,2 | 6 | 25,3 | 55 | Ø 18 | 5 | 40 |
| **6632 10-1/4** | 10 | G1/4 | 8,8 | 9,1 | 16,5 | 6 | 25,3 | 58 | Ø 18 | 5 | 50 |

## Fittings Mod. 6620

Assembly with Mod. 1631, 1635






| DIMENSIONS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Mod. | A | C | F | L | O | V | W | Weight (g) |
| **6620 4-M5** | 4 | 5 | 9 | 38 | 9 | 5,1 | Ø 9 | 13 |
| **6620 4-1/8** | 4 | 7,5 | 9 | 43 | 14,5 | 9,8 | Ø 14 | 19 |
| **6620 6-1/8** | 6 | 8 | 12,7 | 48 | 14,5 | 9,8 | Ø 14 | 24 |
| **6620 6-1/4** | 6 | 10 | 12,7 | 52 | 14,5 | 13,2 | Ø 18 | 26 |
| **6620 8-1/8** | 8 | 8 | 14,2 | 51 | 14,5 | 9,8 | Ø 14 | 32 |
| **6620 8-1/4** | 8 | 10 | 14,2 | 55 | 14,5 | 13,2 | Ø 18 | 34 |

## Fittings Mod. 1631

For codes, drawings and dimensions please refer to page 4/2.05.09



| Mod. |
|---|
| **1631 01-** |
| **1631 02-** |
| **1631 03-** |




The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6610

Models without reference (* or •) can be always assembled with Mod. 1631; 1635.






DIMENSIONS


| Mod. | A | C | F | M | O | V | W | Weight (g) | |
|---|---|---|---|---|---|---|---|---|---|
| **6610 4-M5** | 4 | 5 | 9 | 19 | 9 | 5,1 | Ø 9 | 9 | |
| **6610 4-M6** | 4 | 5 | 9 | 19 | 9 | 5,1 | Ø 9 | 8 | • |
| **6610 4-1/8** | 4 | 7,5 | 9 | 21,5 | 14,5 | 9,8 | Ø 14 | 14 | |
| **6610 5-M5** | 5 | 5 | 10 | 20 | 9 | 5,1 | Ø 9 | 9 | |
| **6610 5-M6** | 5 | 5 | 10 | 20 | 9 | 5,1 | Ø 9 | 8 | • |
| **6610 5-1/8** | 5 | 8 | 10 | 23 | 14,5 | 9,8 | Ø 14 | 16 | |
| **6610 6-M5** | 6 | 6,5 | 12,7 | 22,5 | 9 | 5,1 | Ø 10 | 12 | |
| **6610 6-M6** | 6 | 6,5 | 12,7 | 22,5 | 9 | 5,1 | Ø 10 | 12 | • |
| **6610 6-1/8** | 6 | 8 | 12,7 | 24 | 14,5 | 9,8 | Ø 14 | 16 | |
| **6610 6-1/4** | 6 | 10 | 12,7 | 26 | 14,5 | 13,2 | Ø 18 | 19 | |
| **6610 8-1/8** | 8 | 8 | 14,2 | 25,5 | 14,5 | 9,8 | Ø 14 | 19 | |
| **6610 8-1/4** | 8 | 10 | 14,2 | 27,5 | 14,5 | 13,2 | Ø 18 | 22 | |
| **6610 8-3/8** | 8 | 11 | 14,2 | 28,5 | 14,5 | 16,7 | Ø 21 | 23 | |
| **6610 10-1/4** | 10 | 8,8 | 16,5 | 29 | 14,5 | 13,2 | Ø 18 | 22 | * |
| **6610 10-3/8** | 10 | 10,3 | 16,5 | 30,5 | 14,5 | 16,7 | Ø 21 | 23 | * |
| **6610 12-1/2** | 12 | 12,8 | 16,5 | 32 | 14,5 | 21 | Ø 26 | 37 | * |

• = Assembly required with Mod. SCU, SVU, SCO... M5.
* = Assembly required with Mod. 1635

## Fittings Mod. 6811

***Sprint®***






DIMENSIONS

| Mod. | G | D | H | T | L | SW | Weight (g) | |
|---|---|---|---|---|---|---|---|---|
| **6811 4-M5** | 4 | M5 | 4 | 16,5 | 24,5 | 8 | 3 | * |
| **6811 4-1/8** | 4 | G1/8 | 5,5 | 16,5 | 27,8 | 12 | 10 | |
| **6811 5-1/8** | 5 | G1/8 | 5,5 | 18 | 29,3 | 12 | 9 | |
| **6811 5-1/4** | 5 | G1/4 | 7 | 18 | 31 | 14 | 11 | |
| **6811 6-1/8** | 6 | G1/8 | 5,5 | 18 | 29,3 | 12 | 10 | |
| **6811 6-1/4** | 6 | G1/4 | 7 | 18 | 31 | 14 | 12 | |
| **6811 8-1/8** | 8 | G1/8 | 5,5 | 20,5 | 31,8 | 12 | 12 | |
| **6811 8-1/4** | 8 | G1/4 | 7 | 20,5 | 33,5 | 14 | 13 | |
| **6811 10-1/4** | 10 | G1/4 | 7 | 23 | 36 | 14 | 16 | |
| **6811 10-3/8** | 10 | G3/8 | 8 | 23 | 37,3 | 19 | 25 | |
| **6811 12-3/8** | 12 | G3/8 | 8 | 24 | 38,3 | 19 | 25 | |
| **6811 14-1/2** | 14 | G1/2 | 9 | 28 | 44 | 22 | 39 | |

* = with O-Ring assembled






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. S6110

New pieces







DIMENSIONS

| Mod. | A | D | E | F | H | L | M | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **S6110 6-1/8** | 6 | G1/8 | 14 | 12,7 | 5,5 | 32,5 | 20,5 | 11 | 12 | 21 |
| **S6110 6-1/4** | 6 | G1/4 | 14 | 12,7 | 7 | 34,5 | 20,5 | 11 | 14 | 25 |
| **S6110 8-1/8** | 8 | G1/8 | 14 | 14,2 | 5,5 | 32,5 | 22,5 | 11 | 12 | 21 |
| **S6110 8-1/4** | 8 | G1/4 | 14 | 14,2 | 7 | 34,5 | 22,5 | 11 | 14 | 26 |
| **S6110 8-3/8** | 8 | G3/8 | 14,5 | 14,2 | 8 | 35 | 22,5 | 11 | 19 | 38 |
| **S6110 10-1/4** | 10 | G1/4 | 15,5 | 16,5 | 7 | 39,5 | 26,5 | 15 | 17 | 39 |
| **S6110 10-3/8** | 10 | G3/8 | 15,5 | 16,5 | 8 | 39,5 | 26,5 | 15 | 19 | 44 |
| **S6110 10-1/2** | 10 | G1/2 | 16 | 16,5 | 9 | 40 | 26,5 | 15 | 22 | 57 |
| **S6110 12-1/4** | 12 | G1/4 | 15,5 | 19,5 | 7 | 40,5 | 26,5 | 15 | 17 | 41 |
| **S6110 12-3/8** | 12 | G3/8 | 15,5 | 19,5 | 8 | 40,5 | 26,5 | 15 | 19 | 46 |
| **S6110 12-1/2** | 12 | G1/2 | 16 | 19,5 | 9 | 41 | 26,5 | 15 | 22 | 59 |

## Fittings Mod. 6590 Micro







DIMENSIONS

| Mod. | A | B | F | L | MAX | T | Weight (g) |
|---|---|---|---|---|---|---|---|
| **6590 3** | 3 | M7x0,75 | 5,8 | 18,4 | 5 | 11,4 | 4 |

The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6590







| Mod. | A | B | F | L | N | MAX | SW | SW1 | T | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|
| **6590 4** | 4 | M10x1 | 8,8 | 29 | 14 | 10,5 | 14 | 14 | 20 | 16 |
| **6590 5** | 5 | M12x1 | 9,8 | 31 | 15 | 10,5 | 17 | 17 | 20 | 25 |
| **6590 6** | 6 | M14x1 | 12,5 | 33 | 16 | 10,5 | 17 | 17 | 20 | 28 |
| **6590 8** | 8 | M16x1 | 14,5 | 36 | 17,5 | 11,5 | 19 | 19 | 21 | 35 |
| **6590 10** | 10 | M18x1 | 16,3 | 41,5 | 20,2 | 13 | 22 | 22 | 23,5 | 51 |
| **6590 12** | 12 | M20x1 | 18,8 | 39,5 | 19,2 | 14,5 | 24 | 24 | 25 | 56 |
| **6590 14** | 14 | M22x1 | 20,5 | 41,5 | 20,2 | 17,5 | 27 | 27 | 30 | 82 |

## Fittings Mod. 6580 Micro

Rings UNI 7435 and DIN 471







| Mod. | A | G | L | S | Weight (g) |
|---|---|---|---|---|---|
| **6580 3** | 3 | 5,8 | 19,9 | 2,2 | 2 |

## Fittings Mod. 6580

Rings UNI 7434 and DIN 6799






| Mod. | A | F | G | L | N | S | S1 | S2 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|
| **6580 4** | 4 | 8,4 | 9 | 29 | 14 | 5 | 2,2 | 1,6 | 11 |
| **6580 5** | 5 | 9,4 | 10 | 31 | 15 | 5 | 2,2 | 1,6 | 15 |
| **6580 6** | 6 | 11,7 | 12 | 34 | 16 | 5 | 2,2 | 1,6 | 16 |
| **6580 8** | 8 | 13,7 | 14 | 37 | 17,5 | 5 | 2,2 | 1,6 | 23 |
| **6580 10** | 10 | 15,4 | 17 | 41,5 | 20,2 | 5 | 2,2 | 1,6 | 33 |
| **6580 12** | 12 | 18,3 | 19 | 39,5 | 19,2 | 5,2 | 2,2 | 1,6 | 40 |
| **6580 14** | 14 | 20,5 | 21 | 41,5 | 20,2 | 5,2 | 2,2 | 1,6 | 47 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6580 - reduction

New pieces







| Mod. | A | B | F | G | L | M | N | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| **6580 6-4** | 6 | 4 | 12 | 9 | 31,5 | 16 | 14 | 12 |
| **6580 8-6** | 8 | 6 | 14 | 12,2 | 35 | 17,5 | 16 | 19 |
| **6580 10-8** | 10 | 8 | 16 | 14 | 39 | 20 | 17,5 | 25 |
| **6580 12-10** | 12 | 10 | 19 | 16 | 40,5 | 19 | 20 | 35 |

## Fittings Mod. 6593

New pieces







| Mod. | A | D | E | F | G | H | L | K (max) | K (min) | SW | SW1 | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **6593 6-1/8** | 6 | G1/8 | 10 | M12x1 | 16,4 | 6 | 24,5 | 8,5 | 2 | 15 | 17 | 19 |
| **6593 6-1/4** | 6 | G1/4 | 11,5 | M12x1 | 18,5 | 7 | 26 | 6,5 | 2 | 17 | 17 | 22 |
| **6593 8-1/8** | 8 | G1/8 | 10 | M15x1 | 18,5 | 6 | 27 | 9,5 | 2 | 17 | 19 | 26 |
| **6593 8-1/4** | 8 | G1/4 | 11,5 | M15x1 | 18,5 | 7 | 28,5 | 9,5 | 2 | 17 | 19 | 26 |
| **6593 10-3/8** | 10 | G3/8 | 12,8 | M18x1 | 24,5 | 8 | 32,5 | 12 | 2 | 22 | 22 | 43 |

## Fittings Mod. 6550 Micro







| Mod. | A | M | SW | Weight (g) |
|---|---|---|---|---|
| **6550 3** | 3 | 13,7 | 6 | 3 |



The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6550







DIMENSIONS

| Mod. | A | C | F | M | SW | Weight (g) |
|---|---|---|---|---|---|---|
| **6550 4** | 4 | 3,5 | 9 | 17,5 | 8 | 8 |
| **6550 5** | 5 | 5,5 | 10 | 20,5 | 9 | 15 |
| **6550 6** | 6 | 4 | 12,7 | 20 | 9 | 17 |
| **6550 8** | 8 | 5 | 14,2 | 22,5 | 11 | 22 |
| **6550 10** | 10 | 5,8 | 16,5 | 26 | 13 | 30 |
| **6550 12** | 12 | 7,3 | 19,5 | 26,5 | 15 | 44 |
| **6550 14** | 14 | 8,3 | 21,5 | 28,5 | 17 | 71 |

## Fittings Mod. 6540 Micro







DIMENSIONS

| Mod. | A | L | M | SW | Weight (g) |
|---|---|---|---|---|---|
| **6540 3** | 3 | 21,4 | 13,7 | 6 | 4 |

## Fittings Mod. 6540






DIMENSIONS

| Mod. | A | C | F | L | M | SW | Weight (g) |
|---|---|---|---|---|---|---|---|
| **6540 4** | 4 | 3,5 | 9 | 35 | 17,5 | 8 | 14 |
| **6540 5** | 5 | 5,5 | 10 | 41 | 20,5 | 9 | 21 |
| **6540 6** | 6 | 4 | 12,7 | 40 | 20 | 9 | 24 |
| **6540 8** | 8 | 5 | 14,2 | 45 | 22,5 | 11 | 32 |
| **6540 10** | 10 | 5,8 | 16,5 | 52 | 26 | 13 | 43 |
| **6540 12** | 12 | 7,3 | 19,5 | 53 | 26,5 | 15 | 60 |
| **6540 14** | 14 | 8,3 | 21,5 | 57 | 28,5 | 17 | 75 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.


## Fittings Mod. 6600




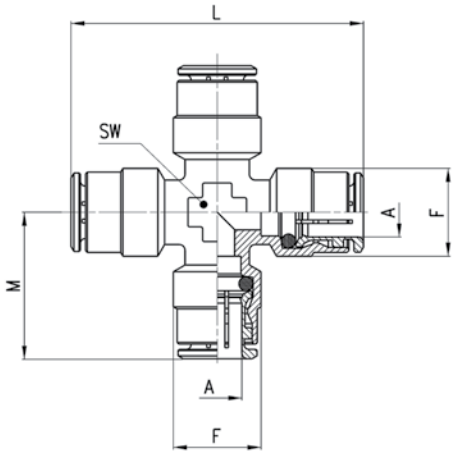


| Mod. | A | F | L | M | SW | Weight (g) |
|---|---|---|---|---|---|---|
| **6600 4** | 4 | 9 | 38 | 19 | 9 | 26 |
| **6600 5** | 5 | 10 | 41 | 20,5 | 9 | 29 |
| **6600 6** | 6 | 12,7 | 44 | 22 | 10 | 35 |
| **6600 8** | 8 | 14,2 | 49 | 24,5 | 12 | 50 |
| **6600 10** | 10 | 16,5 | 55 | 27,5 | 14 | 63 |
| **6600 12** | 12 | 19,5 | 56 | 28 | 16 | 84 |

## Fittings Mod. 6560 Micro




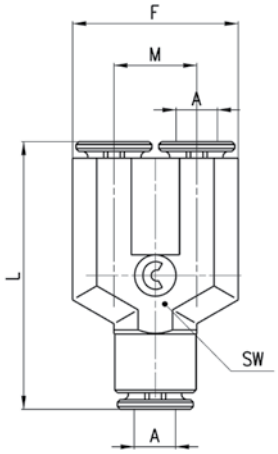


| Mod. | A | F | L | M | SW | Weight (g) |
|---|---|---|---|---|---|---|
| **6560 3** | 3 | 12 | 20,4 | 6 | 6 | 5 |

## Fittings Mod. 6560



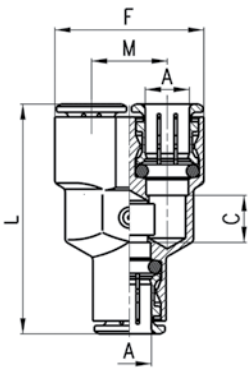



| Mod. | A | C | F | L | M | Weight (g) |
|---|---|---|---|---|---|---|
| **6560 4** | 4 | 5 | 18 | 33 | 9 | 19 |
| **6560 6** | 6 | 7 | 24,5 | 39 | 12,5 | 30 |
| **6560 8** | 8 | 9 | 28,5 | 44 | 14,5 | 42 |
| **6560 10** | 10 | 15,5 | 32 | 53,5 | 16 | 63 |



The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Cartridge Mod. 6700 Micro



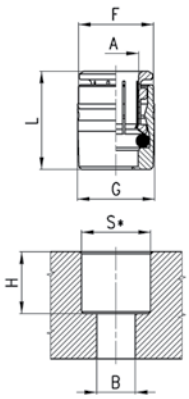



DIMENSIONS

| Mod. | A | B | F | G | H | L | S | Weight (g) |
|---|---|---|---|---|---|---|---|---|
| **6700 3** | 3 | 2 | 5,9 | 6,2 | 6,3 | 9,2 | 6 | 1 |

## Cartridge Mod. 6700

S* = Metallic seat ( + 0.05 - 0 )
S* = Synthetic seat ( + 0.03 - 0,02 ).



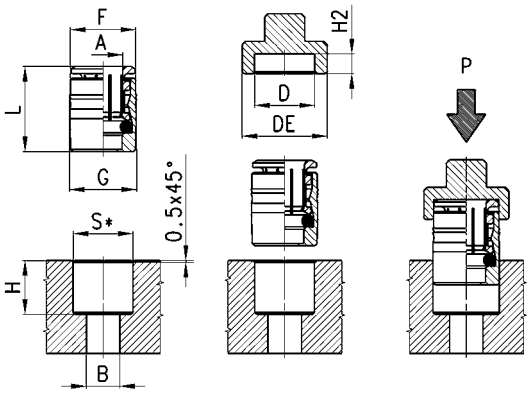



DIMENSIONS

| Mod. | A | B | D | DE | F | G | H | H2 | L | S* | P min (Kg) | P max (Kg) | Weight (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **6700 4** | 4 | 3,5 | 8,8 | 14 | 8,6 | 9 | 11 | 3,1 | 14,5 | 8,75 | 314 | 439 | 4 |
| **6700 5** | 5 | 3,5 | 9,8 | 15 | 9,6 | 10 | 11,5 | 3,1 | 15,5 | 9,75 | 251 | 439 | 5 |
| **6700 6** | 6 | 4 | 12 | 17 | 11,8 | 12,2 | 12 | 3,6 | 16,5 | 11,95 | 314 | 533 | 8 |
| **6700 8** | 8 | 6 | 14 | 19 | 13,8 | 14,2 | 14 | 3,1 | 18 | 13,95 | 345 | 471 | 11 |
| **6700 10** | 10 | 8 | 16 | 21 | 15,8 | 16,2 | 16,5 | 3,1 | 20,5 | 15,95 | 439 | 485 | 15 |

## Closed pushing fittings Mod. 6750







DIMENSIONS

| Mod. | A | G | L | Weight (g) |
|---|---|---|---|---|
| **6750 4** | 4 | 8,8 | 15 | 4 |
| **6750 6** | 6 | 11,8 | 17 | 7 |
| **6750 8** | 8 | 13,8 | 18,5 | 9 |
| **6750 10** | 10 | 15,8 | 21 | 12 |
| **6750 12** | 12 | 17,8 | 20 | 15 |

## Fittings Mod. 6850



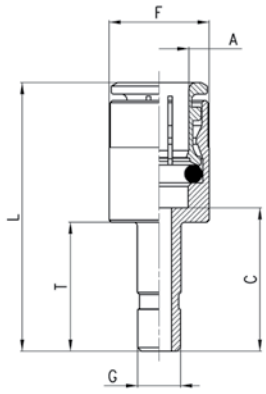


DIMENSIONS

| Mod. | A | G | C | F | L | T | Weight (g) |
|---|---|---|---|---|---|---|---|
| **6850 6-4** | 6 | 4 | 17,5 | 12,7 | 33,5 | 16,5 | 11 |
| **6850 8-6** | 8 | 6 | 19 | 14 | 36,5 | 18 | 15 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fitting Mod. 6800 Micro



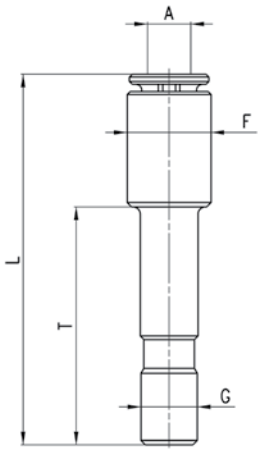



DIMENSIONS

| Mod. | A | F | G | L | T | Weight (g) |
|---|---|---|---|---|---|---|
| **6800 3-4** | 3 | 5,8 | 4 | 26 | 16,5 | 2 |

## Fittings Mod. 6800






DIMENSIONS


| Mod. | A | G | C | F | L | T | Weight (g) |
|---|---|---|---|---|---|---|---|
| **6800 4-5** | 4 | 5 | 19 | 9 | 33 | 18 | 8 |
| **6800 4-6** | 4 | 6 | 15,5 | 9 | 29,5 | 18 | 9 |
| **6800 4-8** | 4 | 8 | 18 | 9 | 32 | 20,5 | 10 |
| **6800 5-6** | 5 | 6 | 19 | 10 | 34 | 18 | 11 |
| **6800 5-8** | 5 | 8 | 18 | 10 | 33 | 20,5 | 12 |
| **6800 6-8** | 6 | 8 | 18 | 12,7 | 34 | 20,5 | 12 |
| **6800 6-10** | 6 | 10 | 20,5 | 12,7 | 36,5 | 23 | 17 |
| **6800 6-12** | 6 | 12 | 17,5 | 12,7 | 33,5 | 24 | 21 |
| **6800 8-10** | 8 | 10 | 20,5 | 14 | 38 | 23 | 15 |
| **6800 8-12** | 8 | 12 | 21,5 | 14 | 39 | 24 | 22 |
| **6800 10-12** | 10 | 12 | 20,3 | 16,5 | 40,5 | 24 | 27 |
| **6800 10-14** | 10 | 14 | 24,3 | 16,5 | 44,5 | 28 | 33 |
| **6800 12-14** | 12 | 14 | 24,3 | 18,8 | 45,5 | 28 | 27 |



The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Fittings Mod. 6950







| DIMENSIONS | | | |
|---|---|---|---|
| Mod. | G | L | Weight (g) |
| **6950 4** | 4 | 32,5 | 3 |
| **6950 6** | 6 | 35,5 | 4 |
| **6950 8** | 8 | 40,5 | 7 |
| **6950 10** | 10 | 46 | 10 |
| **6950 12** | 12 | 48 | 13 |
| **6950 14** | 14 | 52 | 17 |

## Fittings Mod. 6555



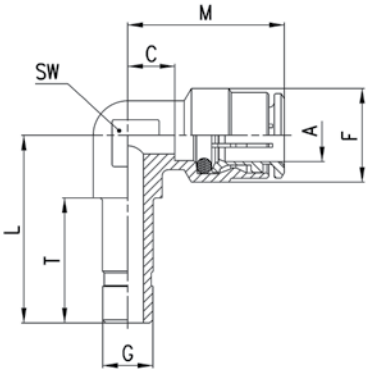




| DIMENSIONS | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Mod. | A | G | C | L | F | T | M | SW | Weight (g) |
| **6555 4-4** | 4 | 4 | 3,5 | 22 | 9 | 16,5 | 17,5 | 9 | 8 |
| **6555 6-6** | 6 | 6 | 4 | 24,5 | 12,7 | 18 | 20 | 9 | 14 |
| **6555 8-8** | 8 | 8 | 5 | 27,5 | 14,2 | 20 | 22,5 | 11 | 21 |
| **6555 10-10** | 10 | 10 | 5,8 | 32 | 16,5 | 23 | 26 | 13 | 26 |

## Protection caps Mod. 6708



Self-extinguishing material
colour black V0




| DIMENSIONS | | | | |
|---|---|---|---|---|
| Mod. | A | F | L | Weight (g) |
| **6708 4** | 4 | 10,7 | 10,7 | 1 |
| **6708 5** | 5 | 11,7 | 11 | 1 |
| **6708 6** | 6 | 13,7 | 11,5 | 1 |
| **6708 8** | 8 | 15,7 | 12,5 | 1 |
| **6708 10** | 10 | 18,5 | 13 | 1 |
| **6708 12** | 12 | 20,7 | 15 | 2 |
| **6708 14** | 14 | 23,7 | 15 | 2 |






The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.

## Plug Mod. 6900 Micro

Material: plastic



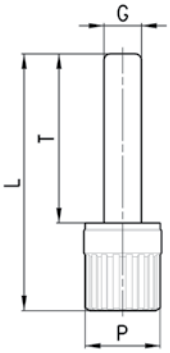



DIMENSIONS

| Mod. | G | L | P | T | Weight (g) |
|---|---|---|---|---|---|
| **6900 3** | 3 | 20,5 | 6 | 13,5 | 1 |

## Plug Mod. 6900

Material: plastic






DIMENSIONS

| Mod. | G | L | P | T | Weight (g) |
|---|---|---|---|---|---|
| **6900 4** | 4 | 29 | 8 | 20 | 1 |
| **6900 5** | 5 | 29,5 | 8 | 20,5 | 1 |
| **6900 6** | 6 | 31,5 | 8 | 22,5 | 1 |
| **6900 8** | 8 | 34,5 | 12 | 24,5 | 2 |
| **6900 10** | 10 | 37 | 12 | 27 | 2 |
| **6900 12** | 12 | 40,5 | 16 | 28,5 | 3 |
| **6900 14** | 14 | 42,5 | 16 | 30,5 | 3 |

## Disconnecting tube set Mod. SP

The set includes keys to disconnect tubes with diameters between 4 and 12 mm.



| Mod. |
|---|
| **SP** |



The company reserves the right to vary models and dimensions without notice.
Products designed for industrial applications. Sale to general public is forbidden.